CUSTOMER	PROPERTY	DATE
Arrigo CDJR Sawgrass	5901 Madison Ave, Tamarac, FL	Oct 11, 2026

PRIVATE CLIENT PROPOSAL / MORGAN AUTOMOTIVE GROUP


Arrigo CDJR Sawgrass

Commercial HVAC Replacement Proposal

UNITS 7 & 8 | TWO MATCHING 7.5-TON SYSTEMS

5901 Madison Avenue | Tamarac, FL 33321

Prepared for Al Garcia

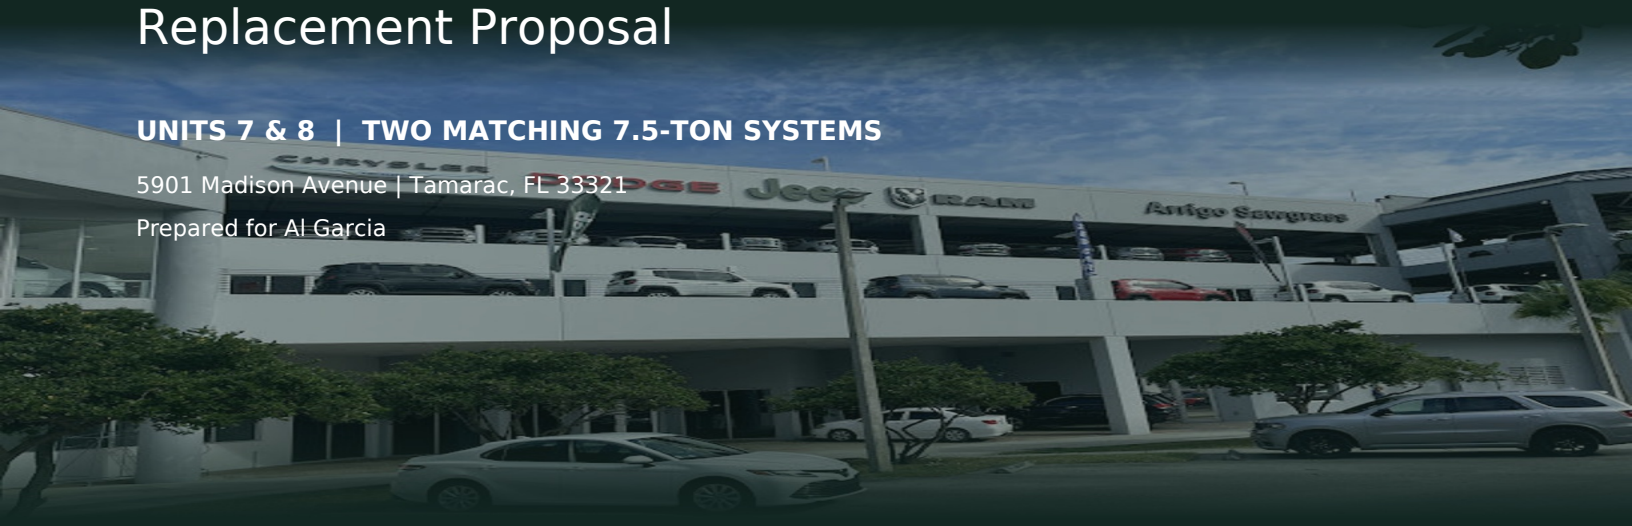

YOUR TWO-SYSTEM BUNDLE INVESTMENT

$76,892.00

Unit 7 | Executive Office • Unit 8 | Mezzanine Showroom

6% combined-approval savings | $4,908.00

02 SYSTEMS • 6% PACKAGE DISCOUNT • $4,908.00 SAVINGS

CUSTOMER	PROPERTY	DATE
Arrigo CDJR Sawgrass	5901 Madison Ave, Tamarac, FL	Oct 11, 2026

01 / EQUIPMENT SCHEDULE

Units 7 & 8 | Identical replacements

Lennox Elite commercial split systems | 208/230V / 3-phase / 60Hz | R-454B

Equipment basis: Lennox Quote #795055 / Project #1200072 (one-system quotation)

EQUIPMENT / DESIGNATION	MODEL / ITEM	QTY
Outdoor condenser, each system	EL090KCSST1Y / 30Z49	2
Matching air handler, each system	EL090KASD-1Y / 30Y33	2
10 kW electric heat, 208/230V 3Ph	38C11	2

EQUIPMENT & SERVED AREA

Unit 7 serves the Executive Office; Unit 8 serves the Mezzanine Showroom. Each receives a 7.5-ton Lennox condenser, matching new air handler and 10 kW heat kit. Existing indoor handlers remain on site and are NOT included for removal or disposal; new equipment placement is subject to site verification.

R-454B REFRIGERANT PROVISION

Preliminary system charging basis: approximately 19 lb total R-454B per system at the 25-foot reference line length, with approximately 17 lb per system field-added if 2 lb holding charge is present. Two 20-lb cylinders are budgeted for the two systems. Final charge must follow the manufacturer data and actual piping measurements.

INSTALLATION APPROACH

· Remove and replace existing outdoor condensers; retain old indoor handlers on site. Rig and set new equipment.

- Perform individual line-set suitability checks, evacuation, R-454B charging and complete commissioning for each replacement.

CUSTOMER	PROPERTY	DATE
Arrigo CDJR Sawgrass	5901 Madison Ave, Tamarac, FL	Oct 11, 2026

02 / COMPREHENSIVE INSTALLATION

Major mechanical & electrical scope

The following work is included for BOTH replacement systems.

OUTDOOR EQUIPMENT REMOVAL & LIFTING

Recover refrigerant and disconnect/remove existing outdoor condensers only. Existing indoor air handlers will remain in place and will not be removed or disposed of. Coordinate rigging and equipment placement.

DUCT INSTALLATION

Modify/fabricate local supply and return air duct transitions and plenums for each replacement air handler; seal and secure accessible connections.

CONDENSER LINE WORK

Adapt compatible refrigerant piping, reconnect liquid/suction circuits, install fittings and insulation, pressure test with nitrogen, evacuate and commission each system.

WALL CUT-THROUGH & PENETRATIONS

Drill or core necessary wall openings for new line routes, provide sleeves, protect exposed lines, and seal new penetrations appropriately.

ELECTRICAL & HEAT

Provide equipment electrical connection work at each 208/230V three-phase condenser and indoor air handler; connect 10 kW heat kits, controls and condensate safety connections, subject to existing circuit suitability.

TESTING & TURNOVER

Complete leak testing, airflow and temperature verification, charging, safety-control checks, startup and handover for both systems.

CUSTOMER	PROPERTY	DATE
Arrigo CDJR Sawgrass	5901 Madison Ave, Tamarac, FL	Oct 11, 2026

03 / INDIVIDUAL & COMBINED PRICING

Your replacement investment

Each 7.5-ton replacement can be authorized individually at its quoted Arrigo price. Approve both systems together under one purchase authorization to receive the additional 6% package discount.

REPLACEMENT OPTION	PRICE
Unit 7 / Executive Office / 7.5-ton	**$40,900.00**
Unit 8 / Mezzanine Showroom / 7.5-ton	**$40,900.00**

TWO-SYSTEM PACKAGE	AMOUNT
Two individual replacement prices	$81,800.00
Additional 6% bundle discount	-$4,908.00
TOTAL TWO-SYSTEM PACKAGE	**$76,892.00**

TOTAL SAVINGS WITH COMBINED APPROVAL

$4,908.00

COMBINED APPROVAL INCENTIVE

The 6% package discount is valid only when both matching Lennox replacements are approved together. Individual selections remain $40,900.00 each. No supplier equipment price or confidential installation cost allocation is disclosed in this proposal.

CUSTOMER	PROPERTY	DATE
Arrigo CDJR Sawgrass	5901 Madison Ave, Tamarac, FL	Oct 11, 2026

04 / TERMS & ACCEPTANCE

Authorize your selected option

Choose the applicable purchase authorization below.

☐ **Unit 7 only | Executive Office | 7.5-ton**	**$40,900.00**
☐ **Unit 8 only | Mezzanine Showroom | 7.5-ton**	**$40,900.00**
☐ **Units 7 + 8 | Two-system bundle, 6% discount**	**$76,892.00**

SCOPE BOUNDARIES AND WARRANTY

- Includes duct transitions, refrigerant-line work, wall penetrations, removal of old outdoor condensers only, electrical connections, and retention of existing indoor air handlers on site.
- Assumes suitable existing electrical supply, breakers/disconnects, structural support, access, and usable/reconfigurable piping; major power-service or panel upgrades and structural reconstruction are excluded.
- Permit/inspection fees, major duct redesign, unforeseen concealed conditions, and work outside the defined scope require written authorization.
- One-year O’Brien installation labor warranty; manufacturer warranty subject to applicable Lennox terms. Proposal valid for 30 days from October 11, 2026, subject to equipment availability and supplier pricing.

O'BRIEN AC & CONSTRUCTION SERVICES, LLC

Tracy O'Brien, President

Signature: _____

Date: _____

ARRIGO CDJR SAWGRASS

Al Garcia, Authorized Representative

Signature: _____

Date: _____